1. Description

1.1. Project

Project Name	iot_firmware
Board Name	custom
Generated with:	STM32CubeMX 5.5.0
Date	12/10/2020

1.2. MCU

MCU Series	STM32F4
MCU Line	STM32F411
MCU name	STM32F411RETx
MCU Package	LQFP64
MCU Pin number	64

2. Pinout Configuration

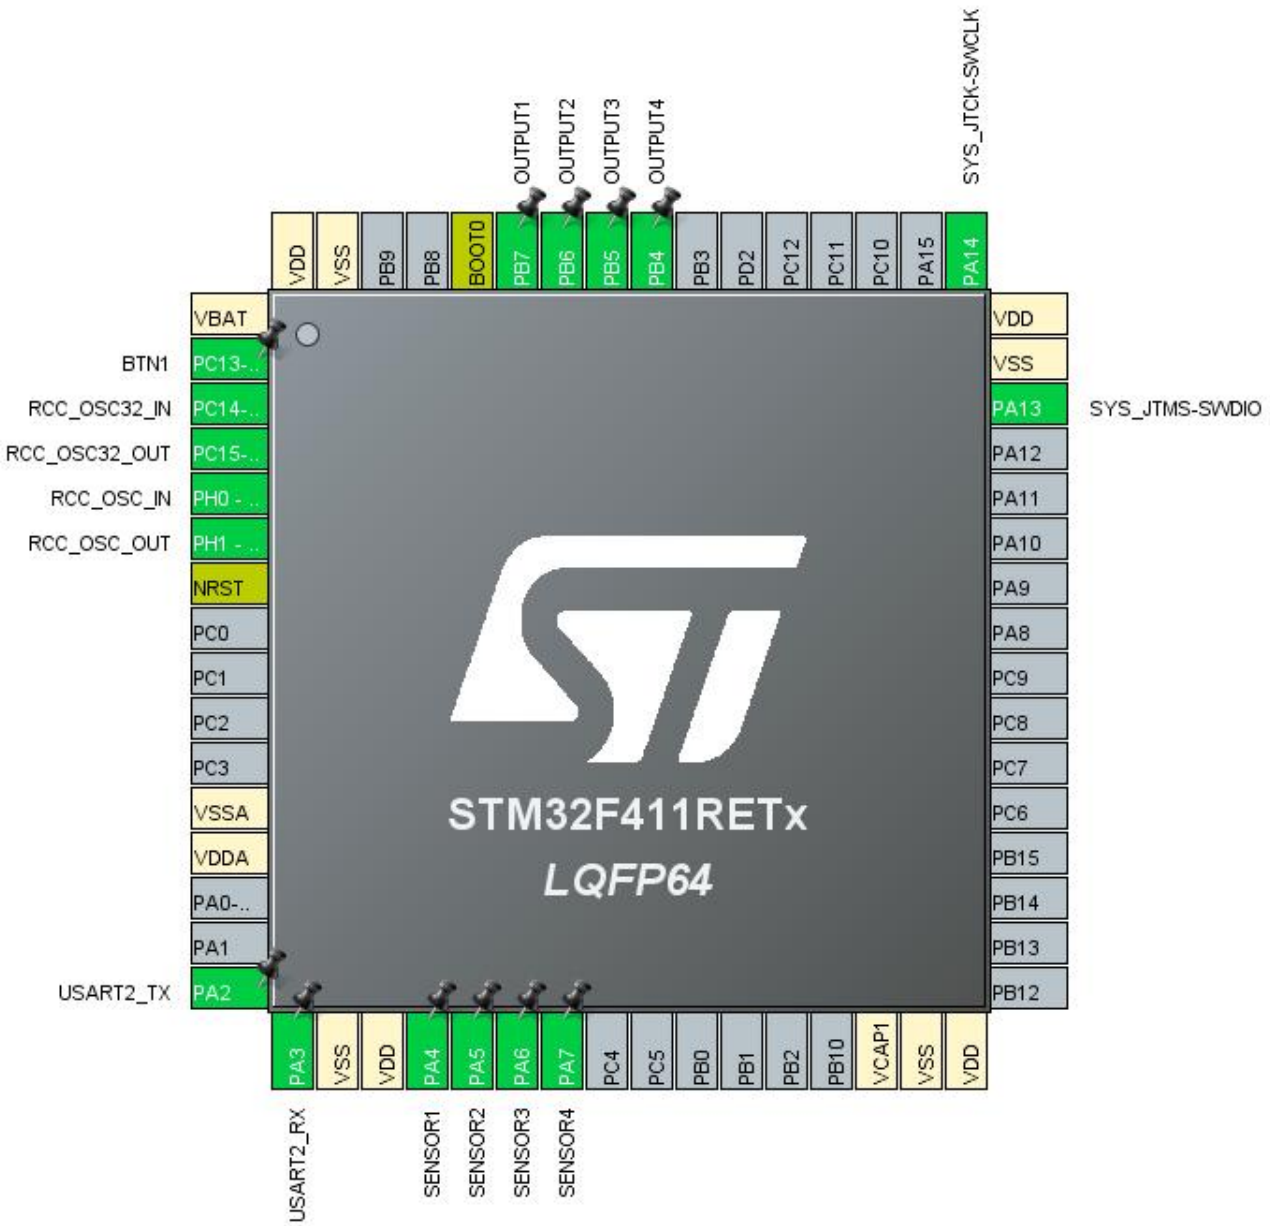

3. Pins Configuration

Pin Number LQFP64	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
2	PC13-ANTI_TAMP *	I/O	GPIO_Input	BTN1
3	PC14-OSC32_IN	I/O	RCC_OSC32_IN	
4	PC15-OSC32_OUT	I/O	RCC_OSC32_OUT	
5	PH0 - OSC_IN	I/O	RCC_OSC_IN	
6	PH1 - OSC_OUT	I/O	RCC_OSC_OUT	
7	NRST	Reset		
12	VSSA	Power		
13	VDDA	Power		
16	PA2	I/O	USART2_TX	
17	PA3	I/O	USART2_RX	
18	VSS	Power		
19	VDD	Power		
20	PA4	I/O	ADC1_IN4	SENSOR1
21	PA5	I/O	ADC1_IN5	SENSOR2
22	PA6	I/O	ADC1_IN6	SENSOR3
23	PA7	I/O	ADC1_IN7	SENSOR4
30	VCAP1	Power		
31	VSS	Power		
32	VDD	Power		
46	PA13	I/O	SYS_JTMS-SWDIO	
47	VSS	Power		
48	VDD	Power		
49	PA14	I/O	SYS_JTCK-SWCLK	
56	PB4 *	I/O	GPIO_Output	OUTPUT4
57	PB5 *	I/O	GPIO_Output	OUTPUT3
58	PB6 *	I/O	GPIO_Output	OUTPUT2
59	PB7 *	I/O	GPIO_Output	OUTPUT1
60	BOOT0	Boot		
63	VSS	Power		
64	VDD	Power		

* The pin is affected with an I/O function

4. Clock Tree Configuration

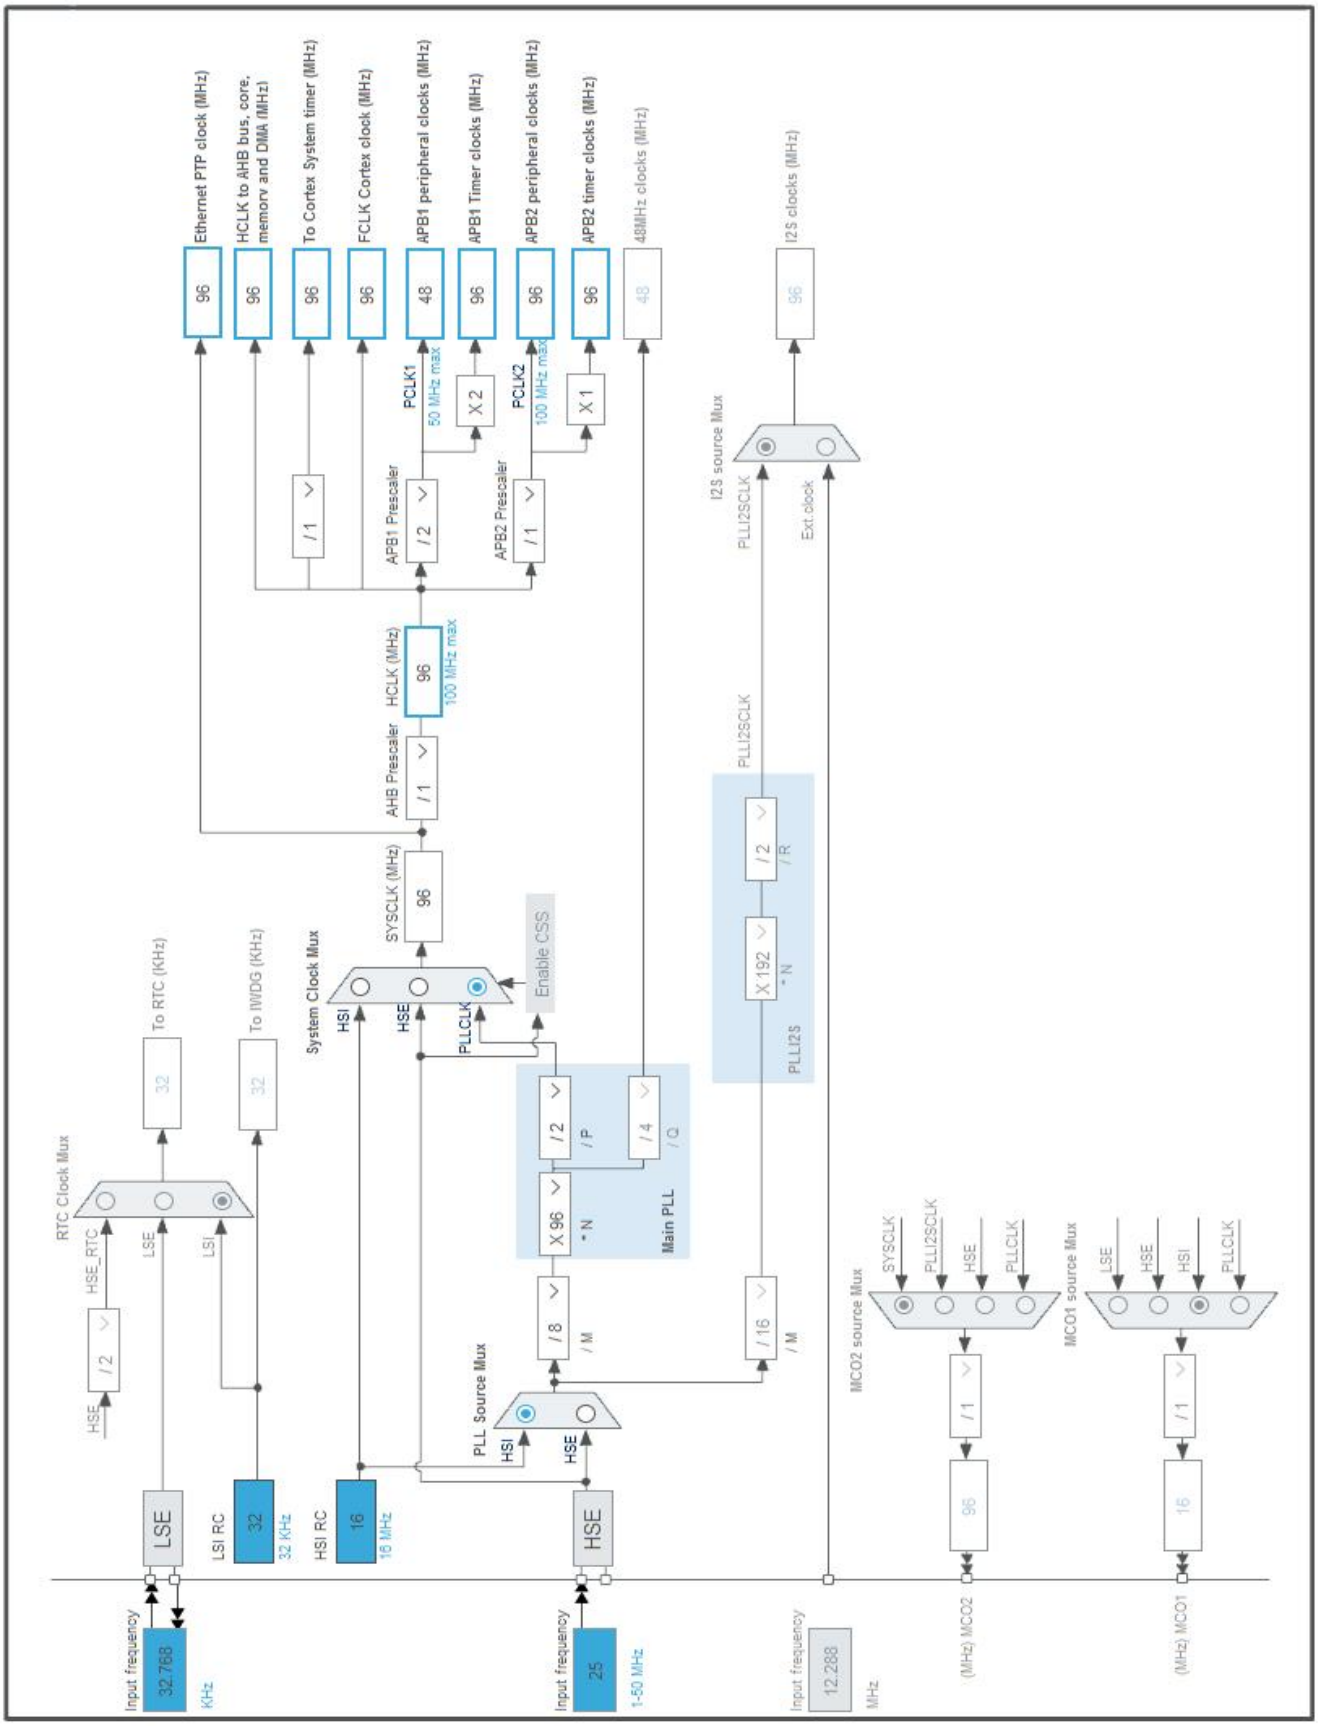

5. Software Project

5.1. Project Settings

Name	Value
Project Name	iot_firmware
Project Folder	E:\EmbeddedIoT\iot_firmware
Toolchain / IDE	EWARM V8.32
Firmware Package Name and Version	STM32Cube FW_F4 V1.24.2

5.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Copy all used libraries into the project folder
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No

6. Power Consumption Calculator report

6.1. Microcontroller Selection

Series	STM32F4
Line	STM32F411
MCU	STM32F411RETx
Datasheet	026289_Rev6

6.2. Parameter Selection

Temperature	25
Vdd	null

7. IPs and Middleware Configuration

7.1. ADC1

mode: IN4

mode: IN5

mode: IN6

mode: IN7

7.1.1. Parameter Settings:

ADC_Settings:

Clock Prescaler	**PCLK2 divided by 8 ***
Resolution	12 bits (15 ADC Clock cycles)
Data Alignment	Right alignment
Scan Conversion Mode	Enabled
Continuous Conversion Mode	**Enabled ***
Discontinuous Conversion Mode	Disabled
DMA Continuous Requests	**Enabled ***
End Of Conversion Selection	EOC flag at the end of single channel conversion

ADC_Regular_ConversionMode:

Number Of Conversion	**4 ***
External Trigger Conversion Source	Regular Conversion launched by software
External Trigger Conversion Edge	None
Rank	1
Channel	Channel 4
Sampling Time	**480 Cycles ***
Rank	**2 ***
Channel	**Channel 5 ***
Sampling Time	**480 Cycles ***
Rank	**3 ***
Channel	**Channel 6 ***
Sampling Time	**480 Cycles ***
Rank	**4 ***
Channel	**Channel 7 ***
Sampling Time	**480 Cycles ***

ADC_Injected_ConversionMode:

Number Of Conversions	0

WatchDog:

Enable Analog WatchDog Mode	false

7.2. GPIO

7.3. RCC

High Speed Clock (HSE): BYPASS Clock Source

Low Speed Clock (LSE) : Crystal/Ceramic Resonator

7.3.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Instruction Cache	Enabled
Prefetch Buffer	Enabled
Data Cache	Enabled
Flash Latency(WS)	3 WS (4 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
TIM Prescaler Selection	Disabled
HSE Startup Timout Value (ms)	100
LSE Startup Timout Value (ms)	5000

Power Parameters:

Power Regulator Voltage Scale	Power Regulator Voltage Scale 1

7.4. SYS

Debug: Serial Wire

Timebase Source: TIM3

7.5. USART2

Mode: Asynchronous

7.5.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

7.6. FREERTOS

Interface: CMSIS_V1

7.6.1. Config parameters:

API:

FreeRTOS API	CMSIS v1

Versions:

FreeRTOS version	10.0.1
CMSIS-RTOS version	1.02

Kernel settings:

USE_PREEMPTION	Enabled
CPU_CLOCK_HZ	SystemCoreClock
TICK_RATE_HZ	1000
MAX_PRIORITIES	7
MINIMAL_STACK_SIZE	128
MAX_TASK_NAME_LEN	16
USE_16_BIT_TICKS	Disabled
IDLE_SHOULD_YIELD	Enabled
USE_MUTEXES	Enabled
USE_RECURSIVE_MUTEXES	Disabled
USE_COUNTING_SEMAPHORES	Disabled
QUEUE_REGISTRY_SIZE	8
USE_APPLICATION_TASK_TAG	Disabled
ENABLE_BACKWARD_COMPATIBILITY	Enabled
USE_PORT_OPTIMISED_TASK_SELECTION	Enabled
USE_TICKLESS_IDLE	Disabled
USE_TASK_NOTIFICATIONS	Enabled
RECORD_STACK_HIGH_ADDRESS	Disabled

Memory management settings:

Memory Allocation	Dynamic / Static
TOTAL_HEAP_SIZE	15360
Memory Management scheme	heap_4

Hook function related definitions:

USE_IDLE_HOOK	Disabled
USE_TICK_HOOK	Disabled

USE_MALLOC_FAILED_HOOK	Disabled
USE_DAEMON_TASK_STARTUP_HOOK	Disabled
CHECK_FOR_STACK_OVERFLOW	Disabled

Run time and task stats gathering related definitions:

GENERATE_RUN_TIME_STATS	Disabled
USE_TRACE_FACILITY	Disabled
USE_STATS_FORMATTING_FUNCTIONS	Disabled

Co-routine related definitions:

USE_CO_ROUTINES	Disabled
MAX_CO_ROUTINE_PRIORITIES	2

Software timer definitions:

USE_TIMERS	Disabled

Interrupt nesting behaviour configuration:

LIBRARY_LOWEST_INTERRUPT_PRIORITY	15
LIBRARY_MAX_SYSCALL_INTERRUPT_PRIORITY	5

7.6.2. Include parameters:

Include definitions:

vTaskPrioritySet	Enabled
uxTaskPriorityGet	Enabled
vTaskDelete	Enabled
vTaskCleanUpResources	Disabled
vTaskSuspend	Enabled
vTaskDelayUntil	Disabled
vTaskDelay	Enabled
xTaskGetSchedulerState	Enabled
xTaskResumeFromISR	Enabled
xQueueGetMutexHolder	Disabled
xSemaphoreGetMutexHolder	Disabled
pcTaskGetTaskName	Disabled
uxTaskGetStackHighWaterMark	Disabled
xTaskGetCurrentTaskHandle	Disabled
eTaskGetState	Disabled
xEventGroupSetBitFromISR	Disabled
xTimerPendFunctionCall	Disabled
xTaskAbortDelay	Disabled
xTaskGetHandle	Disabled

*** User modified value**

8. System Configuration

8.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
ADC1	PA4	ADC1_IN4	Analog mode	No pull-up and no pull-down	n/a	SENSOR1
	PA5	ADC1_IN5	Analog mode	No pull-up and no pull-down	n/a	SENSOR2
	PA6	ADC1_IN6	Analog mode	No pull-up and no pull-down	n/a	SENSOR3
	PA7	ADC1_IN7	Analog mode	No pull-up and no pull-down	n/a	SENSOR4
RCC	PC14-OSC32_IN	RCC_OSC32_IN	n/a	n/a	n/a	
	PC15-OSC32_OUT	RCC_OSC32_OUT	n/a	n/a	n/a	
	PH0 - OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PH1 - OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
SYS	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	
USART2	PA2	USART2_TX	Alternate Function Push Pull	No pull-up and no pull-down	**Very High ***	
	PA3	USART2_RX	Alternate Function Push Pull	No pull-up and no pull-down	**Very High ***	
GPIO	PC13-ANTI_TAMP	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	BTN1
	PB4	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	OUTPUT4
	PB5	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	OUTPUT3
	PB6	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	OUTPUT2
	PB7	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	OUTPUT1

8.2. DMA configuration

DMA request	Stream	Direction	Priority
ADC1	DMA2_Stream0	Peripheral To Memory	Low

ADC1: DMA2_Stream0 DMA request Settings:

Mode:	**Circular ***
Use fifo:	Disable
Peripheral Increment:	Disable
Memory Increment:	**Enable ***
Peripheral Data Width:	**Word ***
Memory Data Width:	**Word ***

8.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Pre-fetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	15	0
System tick timer	true	15	0
TIM3 global interrupt	true	0	0
DMA2 stream0 global interrupt	true	5	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
ADC1 global interrupt	unused		
USART2 global interrupt	unused		
FPU global interrupt	unused		

*** User modified value**

9. Software Pack Report

9.1. Software Pack selected

Vendor	Name	Version	Component
STMicroelectronics	FreeRTOS	0.0.1	Class : CMSIS Group : RTOS SubGroup : FreeRTOS Version : 10.2.0 Class : RTOS Group : Core Version : 10.2.0